

# Falcon<sup>®</sup> PT40

Compact Bar Code Data Collection Terminal



## Features:

- Compact – size of a cell phone
- Integrated bar code laser
- Lightweight – 4.2 oz /119 grams
- 26 key numeric keypad (cell phone layout)
- Up to 2MB of memory
- Large capacity Lithium Ion main battery
- Rechargeable Lithium backup battery
- Supports task switching – up to 4 applications
- Powerful program generator (PPG) to develop applications

## Compact Data Collection

The new Falcon PT40 is a very compact, sleek portable data terminal, sized to fit in your shirt pocket or on a belt clip like a cell phone. Complete with integrated bar code laser and multiple memory options, the PT40 is powerful enough to handle most any batch data collection task. The Falcon PT40 is designed primarily for retail and light industrial applications where low cost and an extremely small form factor are desired.

## Small in Size, Big on Features

With its built-in laser, the PT40 is very snappy at scanning bar codes at distances from 2 inches/5cm up to 34 inches/87cm. The PT40 offers memory options from 256K up to 2MB for large look-up files or extensive data storage. The PT40 even supports the ability to instantly switch between up to 4 applications, providing added flexibility. Additionally, the PT40 features a long lasting Lithium Ion main battery, providing expected battery life of 24+ hours of near constant use between charges. Backed by a rechargeable Lithium backup battery, the PT40 will retain its memory for 3-5 days even when the main battery is completely discharged. A full 26 key keypad is laid out virtually identical to a typical cell phone, providing easy transition for the average user. The crisp display is even backlit for low-light situations. Tested to repeated 1.2 meter (4 foot) drops to concrete, the PT40 is designed to handle demanding data collection tasks.

## Powerful Programming Tool


The PT Program Generator (PPG) is a Windows based programming tool that features a graphical user interface to quickly and easily create your PT40 portable application. The latest version of PPG allows an existing PT 2000 or TopGun application to run without modification on the PT40 (with a simple re-compile).

## International Capabilities

The PT40 was designed for data collection users worldwide. Initially supporting Chinese Simplified and Chinese Traditional (Big5) fonts, the PT40 will continue to be expanded to support other double byte languages in the near future.

## Ease of Use

The PT40 comes with PAL, a simple, yet effective application pre-loaded on every terminal. PAL allows you to start using the PT40 right out of the box to scan bar codes and collect basic inventory data. Simply drop the PT40 in the docking station (or connect the direct connect cable) and send your collected data to your PC.

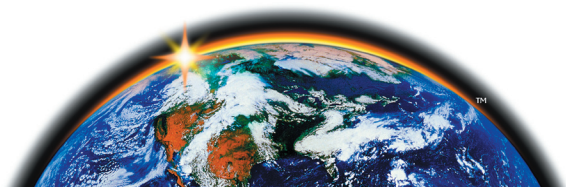

# Specifications

## Falcon® PT40

These product Specifications are subject to change without notice. Additional information concerning this product or other PSC products and services can be found at the PSC website: [www.pscnet.com](http://www.pscnet.com) or contact your PSC representative for more information.

### Mechanical

#### Dimensions

Length: 5.35" (136 mm)

Width: 1.89" (48 mm)

Height: .93" (24 mm)

Weight : 4.2 oz. (119 g) including battery

#### Display

Type: Backlit Graphics FSTN LCD

Size: 96 x 48 pixels

Text: 6 lines x 16 characters wide (small font)

4 lines x 12 characters wide (large font)

Double Byte (Chinese): 3 lines x 8 characters wide

#### Keypad

26 keys with full alphanumeric capability

(cell phone layout)

Four function keys

#### Construction

ABS plastic

Chemical resistant

### Environmental

#### Temperature rating

Operating: 32° to 122° F (0° to 50° C)

Storage: -4° to 158° F (-20° to 70° C)

Humidity: 5 to 95% RH (non-condensing)

Shock: multiple 4-ft. (1.2 m) drops to concrete

### Decoding Capability

(autodiscriminates between)

UPC A, E / EAN 8, 13 / JAN 8, 13 (extensions)

Code 128 Interleaved 2 of 5

Code 39 Code 39 Full ASCII

Code 93 Codabar

### Safety & Regulatory

Electrical: Complies to CE

Emissions: FCC Part 15 - Class A

Laser: CDRH Class 2; IEC Laser Class 2

(CAUTION: Laser Radiation - do not stare into beam)



### Optical

Light source: 650nm Visible Laser Diode (VLD)

Rate: 50 ± 6 scans/sec. bi-directional

Scan angle: 46.5° typical

Depth-of-field: Refer to chart below

Ambient light immunity:

Artificial light: 450 ft-candles (4,844 lux)

Sunlight: 8,000 ft-candles (86,112 lux)

### Depth-of-Field Chart

printing resolution, contrast and ambient light dependent

TYPICAL RANGE					
LABEL DENSITY	5 mil	2.6" to 5.9"	6.6	to 15.0cm	
	7.5 mil	2.0" to 9.2"	5.0	to 23.4cm	
	10mil	1.7" to 12.4"	4.3	to 31.5cm	
	13mil	1.8" to 14.5"	4.6	to 36.8cm	
	20mil*	*** to 20.3"	***	to 51.6cm	
	40mil*	*** to 29.7"	***	to 75.4cm	
	55mil*	*** to 34.4"	***	to 87.4cm	

(\*Minimum distance determined by width of bar code and scan angle)

### Accessories



Serial/Charging Cable  
P/N 600I-2289

Belt Clip  
P/N 1406-0965

AC Adaptor  
P/N 4004-0754 (US)  
P/N 4004-0755 (EU)

Rechargeable  
Li-Ion Battery  
P/N 4006-0319

Docking  
Station  
P/N 640I-0002

Softcase  
P/N 1402-0113

### System

#### Hardware

16-bit CMOS Microprocessor

Real-time Clock and Calendar

RAM: 256 KB to 2 MB

FLASH: 512 KB

#### Beeper

Software programmable speaker volume, duration, and pitch

#### Data Communications

##### PT40

Serial (requires serial cable)

RS-232C; ASCII 7- or 8-bit; Selectable Parity;

300 to 38,400 baud programmable;

Supports CTS/RTS and Xon/Xoff

##### Docking Station

Serial (cable included with dock)

RS-232C; ASCII 7- or 8-bit; Selectable Parity;

300 to 38,400 baud programmable;

Supports CTS/RTS and Xon/Xoff

#### Protocols

ACK/NAK; X Modem; Carriage return only

#### Power

Main Battery: 600 mAh rechargeable Li-Ion.

Typical recharge time: 3-4 hours

Backup Battery: Rechargeable lithium protects RAM and real time clock

**AC Adaptor:** (required for dock)

Input: 100-240v, 50-60Hz, 0.3A

Output: 9VDC, 1.3A

#### Software

Supports programs generated with PT

Program Generator (PPG)

Supports task switching between up to 4 applications

#### International Character Sets

Supports Chinese Traditional (Big 5) and Chinese Simplified

### Specifications are subject to change without notice.

Additional information concerning this product or other PSC products and services can be found at the PSC website: [www.pscnet.com](http://www.pscnet.com), or contact your PSC representative for more information.



#### PSC Inc.

959 Terry Street  
Eugene OR 97402-9150 USA  
Tel: 800 695 5700 or 541 683 5700  
Fax: 541 345 7140

#### PSC Worldwide Sales and Service locations

##### Australia - NSW

Tel: 61 2 9878 8999  
Fax: 61 2 9878 8688

##### Belgium

Tel: 32 2 414 74 09  
Fax: 32 2 410 11 63

##### Brazil

Tel: 55 11 5507 7721  
Fax: 55 11 5507 7696

##### Chile

Tel: 562-339-7000  
Fax: 562-339-7985

##### China

Tel: 86 10 6857 9048  
Fax: 86 10 6857 8699

##### China - South

Tel: 86 20 8765 9955  
Fax: 86 20 8765 9955

##### France

Tel: 33 1 64 86 71 00  
Fax: 33 1 64 46 72 44

##### Germany

Tel: 49 6151 93580  
Fax: 49 6151 935858

##### Hong Kong

Tel: 852 25846210  
Fax: 852 25210291

##### India

Tel: 91 11 24621586  
Fax: 91 11 24641662

##### Italy

Tel: 39 039 629031  
Fax: 39 039 6859496

##### Japan

Tel: 81 3 3491 6761  
Fax: 81 3 3491 6656

##### Latin America

Tel: 1 305 539 0111  
Fax: 1 305 539 0206

##### Singapore

Tel: 65 435 1311  
Fax: 65 226 1242

##### Spain

Tel: 34 91 203 65 00  
Fax: 34 91 203 65 01

##### Sweden

Tel: 46 4010 84 92  
Fax: 46 4010 84 91

##### United Kingdom

Tel: 44 1923 809500  
Fax: 44 1923 809505