

# QuickScan<sup>®</sup> 6000 Plus

Handheld Scanner



#### **Ideal for:**

- All in-store applications

#### **Features:**

- Low power consumption
- AutoSense<sup>®</sup> stand for hands-free operation
- Dual interfaces with AutoSelect<sup>™</sup>
- Optional EAS antenna for simultaneous scanning and security tag deactivation
- Universal wedge for additional keyboard emulation, bar code symbologies and data editing

## **Checkout The Handheld Scanner That Is Setting The New Standard At Retail Checkout Around The World**

### **Great Performance is now even Better!**

The QuickScan<sup>®</sup> 6000 Plus handheld scanner offers great performance at a very affordable price. With a high first pass read rate and the best speed-to-read of any scanner in its class, the QS6000 Plus speeds retail checkout. And its 13" / 33 cm depth-of-field with 100% UPC labels extends the user's working range.

With a high visibility option, utilizing a 650nm laser diode, the user can target and read bar codes even in bright light conditions due to the scanner's inherent tolerance of high ambient light conditions. Plus, PSC's advanced electronics perform well even when reading low contrast labels with poor edge definition.

### **Hardened for Tough Store Environments**

The QS6000 Plus scanner incorporates the most advanced, high durability features available today. The reading engine and optics are protected by anti-shock mounts built to absorb up to 1500 Gs. In fact, the QS6000 Plus can withstand repeated five-foot drops to concrete.


The QS6000 Plus also features a strong, plastic enclosure that guards against liquid and dust infiltration. A tough, rubber-like shield cushions the scanner when dropped, protects the scan window from scratching and prevents the scanner from slipping off counter surfaces.

### **Lightweight & Ergonomic For Maximum Scanning Comfort & Productivity**

The QS6000 Plus scanner was developed with operator comfort in mind—a critical factor that ensures prolonged operator productivity. The weight of its evenly balanced design can be held easily in any size hand, even during extended periods of use. When resting on a horizontal surface, in a stand, or in a belt holster, the handle is quickly and easily grasped for "scoop and scan" simplicity.

### **The QuickScan<sup>®</sup> 6000 Plus: An Outstanding Value**

With the QS6000 Plus scanner, there's no need to make trade-offs between quality and affordability. High-end performance, advanced ergonomic design, enhanced durability—the combination of these features in the QS6000 Plus adds up to one of the best values in the industry.

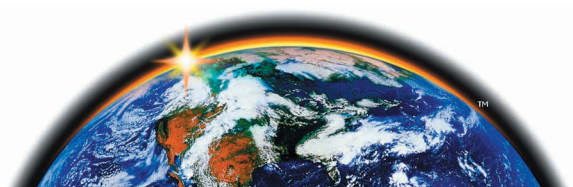

# Specifications

## QS6000 Plus

### PRODUCT

Specifications apply to RS232 interface with 680nm VLD unless otherwise stated.

#### Mechanical

**Dimensions:** 6.50 x 2.76 x 4.23" / 16.51 x 7.01 x 10.74 cm

#### Weight

Scanner: 6.0 ozs. / 170 g  
Cable (32"/81 cm): 6.2 ozs / 176 g

#### Cable length options

Collapsed: 32" / 81 cm,  
Max. Working: 72" / 183 cm;  
Collapsed: 80" / 203 cm,  
Max. Working: 120" / 305 cm

(For other cable options, contact your PSC sales representative.)

#### Optical

**Light source:** Visible Laser Diode(VLD), 680 nm-nominal (650 nm-optionnel)  
**Scan system:** Electromagnetic dithering mirror  
**Rate:** 42 scans/sec. (nominal)  
**Depth-of-field:** Refer to chart on this page  
**Resolution:** 5 mils / 0.13mm  
**Print contrast ratio:** 30% minimum  
**Pitch:** ±65°  
**Skew:** ±55°  
**Scan angle:** 46°  
**Ambient light immunity**  
Artificial light: 1,200 foot candles / 12600 Lux  
Sunlight: 8,000 foot candles / 84000 Lux

#### Electrical

**NOTE:** Specifications using the 680 nm laser diode & cable

#### Operating voltage

Undecoded: 4.2 V to 14 VDC  
Decoded: 3.8 V to 20 VDC

#### Operating current - nominal

Undecoded: 70 mA to 5 VDC  
Decoded: 120 mA to 5 VDC

#### Idling current - nominal

Undecoded: 10 µA to 5 VDC,  
Decoded: 23 mA to 5 VDC;  
Decoded, lowest power mode: 14 mA to 5 VDC

#### Environmental

#### Temperature

Operating: 32° to 122° F / 0° to 50° C  
Storage: -40° to 158° F / -40° to 70° C

#### Humidity: 5 to 95% NC

**Shock (at 23°C):** Withstands multiple 5.0' / 1.5 m drops onto concrete / 100+ drops to countertop

#### Vibration: MIL-STD-810E

**Water & Dust:** Resistant, IEC529 rating IP53DW

#### Depth-of-Field

Printing resolution, contrast and ambient light dependent

Label Density	Range
5 mils	1.0 to 3.0" / 2.5 to 7.6 cm
7.5 mils	0.5 to 6.0" / 13 to 15.2 cm
10 mils	0.0 to 9.0" / 0.0 to 22.9 cm
13 mils	0.0 to 13.0" / 0.0 to 33.0 cm
20mils	up to 20.0" / up to 48.3 cm

#### Available Mount Options



P/N: 7-0204  
AutoSense®

P/N: 7-0470  
AutoSense®  
(w/o base)

P/N: 5-0788  
Universal Holster

P/N: 7-0393  
Mountable  
Tabletop

#### Decoding Capability

- UPC A, E / EAN 8,13 / JAN 8, 13 (Codes add-ons P2 / P5, Code 128)
- Code 128/EAN 128
- Codabar
- Pharmacode 39
- Code 93
- Interleaved 2/5
- Standard 2/5, IATA
- Code 39
- MSI/Plessey

#### Communications

AutoSelect™ cable determines active interface

- IBM 4682/92 (Port E)
- IBM 4683/84 (Ports 5B & 9B) and Wand Emulation
- IBM 4693/94 (Ports 5B & 9B) and Wand Emulation
- IBM 46XX / USB Embedded with USB Single Cable
- RS232 & IBM 46xx
- RS232 & Wand Emulation
- RS232 & Standard Keyboard Wedge
- OCIA (formats SP & NCR) & RS232
- Standard Keyboard Wedge & Wand Emulation
- Universal Keyboard Wedge
- Undecoded

#### Safety & Regulatory

**Electrical:** Complies to: Gost R; TÜV; UL; cUL

**Emissions:** Complies to: FCC-A; EN 55022-B; BCIQ CNS 13438; AS/NZS 3548; VCCI-B

**Laser classification:** CDRH Class IIa ;



(ATTENTION: Laser Radiation - do not stare into beam);  
IEC 60825 Class 1 & 2



This product is manufactured in the United States and Singapore.

#### Corporate Headquarters

PSC Inc.  
959 Terry Street  
Eugene OR 97402-9150 USA  
Tel: 800 695 5700 or 541 683 5700  
Fax: 541 345 7140

#### Specifications are subject to change without notice.

Additional information concerning this product or other PSC products and services can be found at the PSC website: [www.pscnet.com](http://www.pscnet.com) or contact your PSC representative for more information.



#### PSC Worldwide Sales and Service locations

Australia - NSW Tel: 61 2 9878 8999 Fax: 61 2 9878 8688	Australia Tel: 61 3 9281 3288 Fax: 61 3 9243 5510	Belgium Tel: 32 2 414 74 09 Fax: 32 2 410 11 63	Brazil Tel: 55 11 5507 7721 Fax: 55 11 5507 7696	Chile Tel: 562-339-7000 Fax: 562-339-7985	China Tel: 86 10 6857 9048 Fax: 86 10 6857 8699	China - South Tel: 86 20 8765 9955 Fax: 86 20 8765 9955	France Tel: 33 1 64 86 71 00 Fax: 33 1 64 46 72 44
Germany Tel: 49 6151 93580 Fax: 49 6151 93588	Hong Kong Tel: 852 25846210 Fax: 852 25210291	India Tel: 91 11 4621586 Fax: 91 11 4623305	Italy Tel: 39 039 629031 Fax: 39 039 6859496	Japan Tel: 81 3 3491 6761 Fax: 81 3 3491 6656	Latin America Tel: 1 305 539 0111 Fax: 1 305 539 0206	Singapore Tel: 65 435 1311 Fax: 65 226 1242	Spain Tel: 34 91 203 65 00 Fax: 34 91 203 65 01
Sweden Tel: 46 4010 84 92 Fax: 46 4010 84 91	Turkey Tel: 90 212 23691 15 Fax: 90 212 23691 16	United Kingdom Tel: 44 1923 809500 Fax: 44 1923 809505					